


可选二位调节分离器
2 directions locking device



六位调节分离器
6 directions locking device

→ 隐藏式、全拉出、同步反弹
→ 材料: 镀锌板
→ 材料厚度(上/中/下轨): 1.0x1.5x1.8mm
→ 无需工具, 抽屉可快速安装与拆卸
→ 静音系统, 滑轨运动顺畅
→ 三维调节, 高度调节0~3mm, 左右调节±2mm, 前后调节0~4mm

→ Concealed, full extension, synchronous push-open
→ Dynamic load capacity: 25kg
→ Material: galvanized steel
→ Material thickness: 1.0x1.5x1.8mm
→ Tool-free quick installation
→ Quiet system guarantees the slide run smoothly without noise
→ 3-way adjustment, 0~3mm height, ±2mm horizontal and 0~4mm front and back

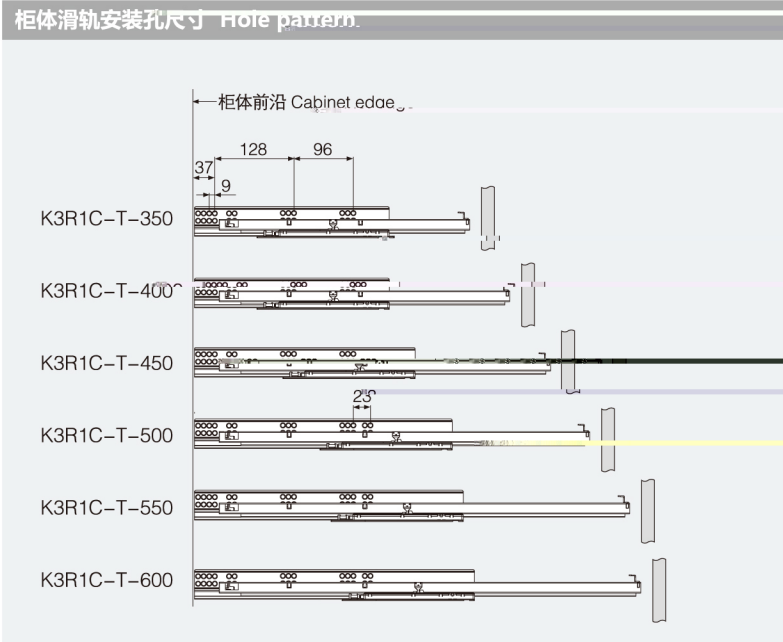

产品型号 Item No.	标称长度NL (mm) Nominal length	拉出长度 (mm) Travel length	最小柜体深度 (mm) (外抽/内抽) Min cabinet depth (Standard/Inner)	包装/包装量 Packing (Set/Box)
K3R1C-T-350	340	323 ± 3	350 / 350+X	5
K3R1C-T-400	390	373 ± 3	400 / 400+X	5
K3R1C-T-450	440	423 ± 3	450 / 450+X	5
K3R1C-T-500	490	473 ± 3	500 / 500+X	5
K3R1C-T-550	540	523 ± 3	550 / 550+X	5
K3R1C-T-600	590	573 ± 3	600 / 600+X	5

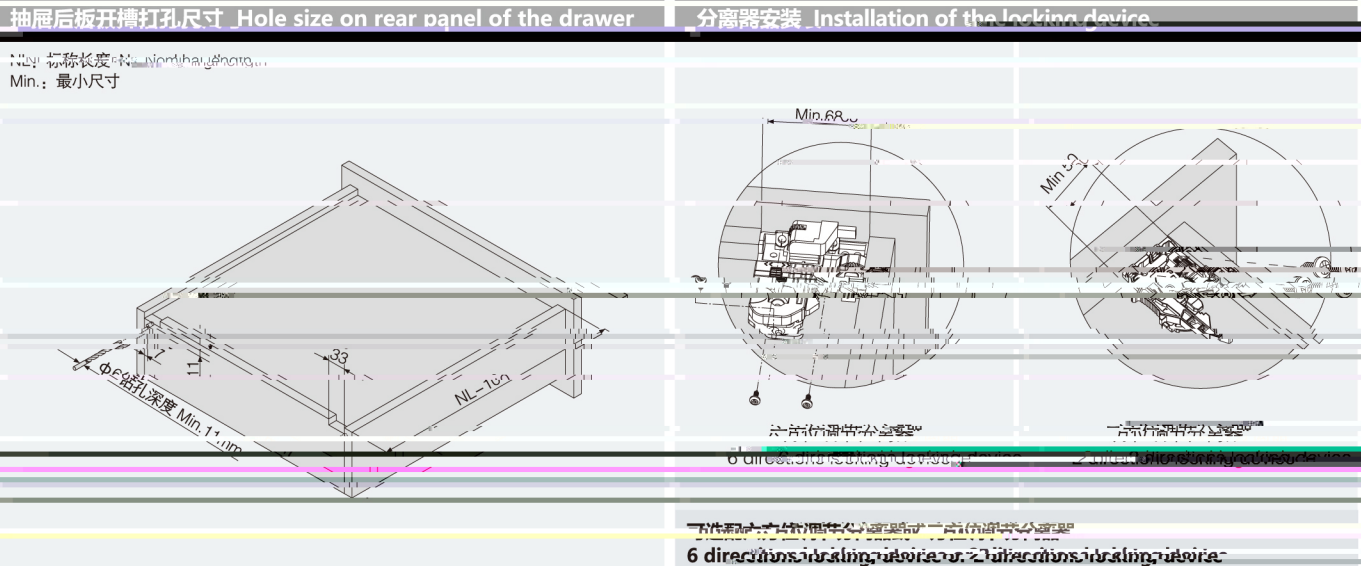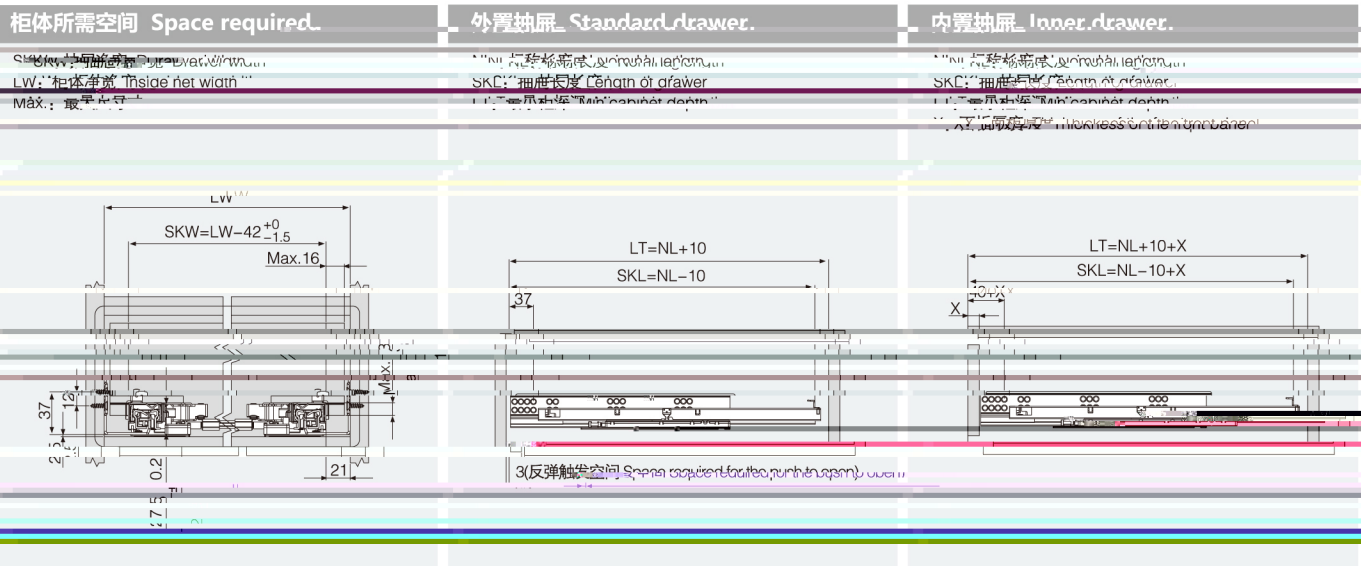

装卸调试步骤说明 Installation instruction

滑轨安装
Installation of the slides

同步弹开对位安装
Installation of the longshore nut base

抽屉安装与调试
Installation of the drawer

抽屉滑入
Removal of the drawer